

Model BE60 Carrier Erector / MP35 Multipacker



BE60



MP35

BE60 Beverage Carrier Erector.

Pearson's BE60 is a portable, compact and extremely reliable Beverage Carrier Erector. Its rugged, proven design enables it to erect four, six and eight pack carriers at speeds up to 60* carriers per minute. Adjustments are easily made while accommodating a full range of carrier sizes. Flat carriers are automatically selected from a magazine, opened and locked into place. The BE60's vacuum system effectively deals with difficulties in feeding due to warped carriers and out of spec board.

Like all Pearson products, the BE60 is backed by Pearson's experienced factory professionals as well as one of the largest teams of PMMI certified regional service technicians in the industry, available 24-hours a day, 7-days a week - worldwide.

**Speeds depend upon container or carrier configuration, pack pattern & case size.*

MP35 Adjustable Multipacker.


Pearson's MP35 Multipacker is designed and ruggedly constructed to automatically load four empty 6-pack carriers, six empty 4-pack carriers or three empty 8-pack carriers into trays, RSC, HSC, or Tablock cases at speeds up to 30* cases per minute. The MP35 can be configured for either in-line or crossflow feed of carriers into cases.

Like all Pearson products, the MP35 is backed by Pearson's experienced factory professionals as well as one of the largest teams of PMMI certified regional service technicians in the industry, available 24-hours a day, 7-days a week - worldwide.


BE60



4-pack carrier




6-pack carrier




8-pack carrier


MP35



Four 6-packs



Six 4-packs



Three 8-packs


Packaging - Processing

Bid on Equipment


1-847-683-7720

www.bid-on-equipment.com

CASE PACKERS ○ CASE ERECTORS ○ BAG INSERTERS & UNCUFFERS ○ CASE SEALERS


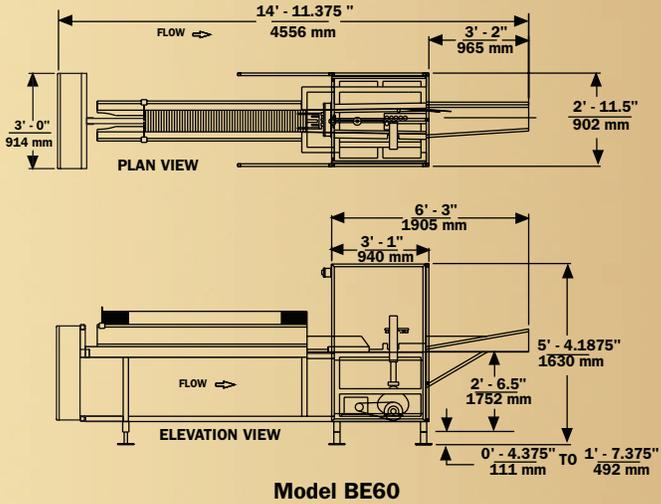


Model BE60

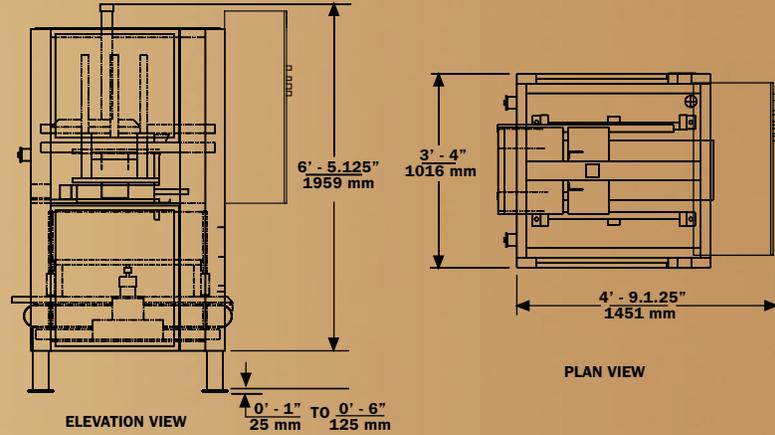

Model MP35

Packaging Line Arrangements

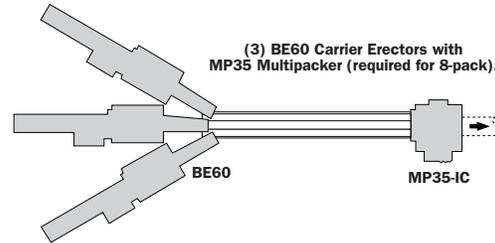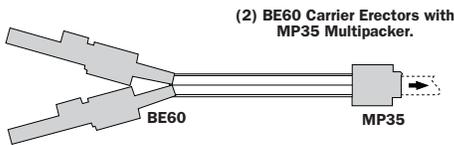

UTILITY REQUIREMENTS BE60

Electrical:

230/460V, 3-phase,
60 Hz Std., 1.37 kVA

Pneumatic:

3.12 SCFM @ 60 PSI
(0.087 m³/cycle @ 551.2 KPa)

Shipping Weight:

1700 lbs. (765 kg)

ERECTED CARRIER SIZE RANGES


LENGTH	WIDTH	BODY DEPTH	OVERALL HEIGHT
5" - 11.25"	4.5" - 5.5"	4.75" - 6"	6" - 9"
127 - 286 mm	114 - 140 mm	121 - 152 mm	152 - 229 mm

KNOCKED-DOWN CARRIER SIZE RANGES

LENGTH	WIDTH		
7.5" - 14"	8.25" - 11.75"		
191 - 356 mm	210 - 299 mm		

MACHINE SIZE

LENGTH	WIDTH	HEIGHT
15' - 0"	2' - 11.5"	5' - 4.1875"
4572 mm	902 mm	1630 mm



BE60

UTILITY REQUIREMENTS MP35

Electrical:

230/460V, 3-phase,
60 Hz Std., 0.35 kVA

Pneumatic:

0.4 SCF/Cycle @ 80 PSI
(0.011 m³/cycle @ 551.2 KPa)

Shipping Weight:


1350 lbs. (608 kg)

ERECTED CASE SIZE RANGES

LENGTH	WIDTH	DEPTH
10" - 21"	10" - 17"	4" - 10"
254 - 533 mm	254 - 432 mm	101 - 254 mm

MACHINE SIZE

LENGTH	WIDTH	HEIGHT
3' - 4"	3' - 4"	6' - 5.125"
1016 mm	1016 mm	1959 mm



MP35