

# CTFL 440V

## Compact Tray Former



where products meet packaging®

Born from ADCO's workhorse tray former, the CTF 470V, the CTFL 440V tray former is ideal for packagers that are looking for an alternative to use in lower speed applications. The CTFL 440V features simple, mechanical operation and it includes best in class technology, such as a Nordson® hotmelt glue system. This compact and robust tray former is ready for the most demanding production environments. With its simple operation, fast changeover capability and low-cost, the choice is clear. The ADCO CTFL is your next tray former. Like all ADCO machines, the CTFL 440V is constructed in stainless steel and is available in both, standard and washdown configurations.

### Benefits

- Compact footprint saves space and simplifies integration
- Mechanical forming section ensures consistent, reliable and simple operation
- Flexible design makes tray size and style changes easier and less costly
- Quick change option improves productivity and reduces downtime
- Stainless steel construction improves cleanability
- Advanced guard design keeps operators safe and maximizes maintenance access

# CTFL 440V Compact Tray Former

## Product Features

- Stainless steel construction
- Mechanically driven forming mandrel with overload protection
- Variable speed drive system
- 30" long inclined gravity magazine with optional 5' powered magazine
- Adjustable mandrel stroke capable of forming 2" to 8" (50mm to 200mm) deep glue or lock trays
- Nordson® hot melt glue system
- Relay logic with push button controls
- Category 3 safety system with a fully interlocked barrier guard package
- Many options available upon request

## Typical Applications

- Retail Ready/Display Ready Packaging
- Beverage
- Consumer products
- Frozen foods
- Meat & Poultry
- Refrigerated/Fresh foods
- Club store packaging


## Utilities

### Electrical


230/460 VAC, 3-Phase with ground (PE), 60/50 hz

### Air Consumption



10 CFM @ 95-PSI

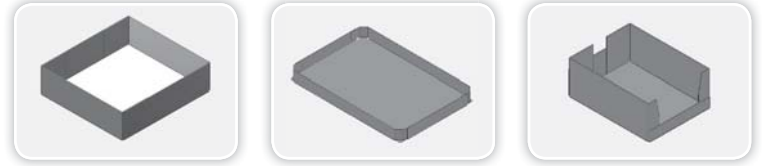

## PLAN VIEW

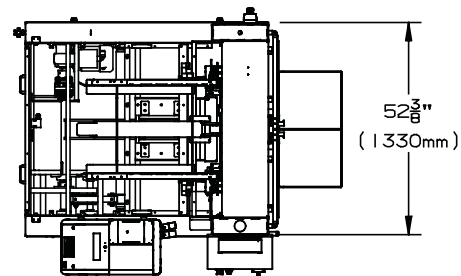

## SIDE ELEVATION

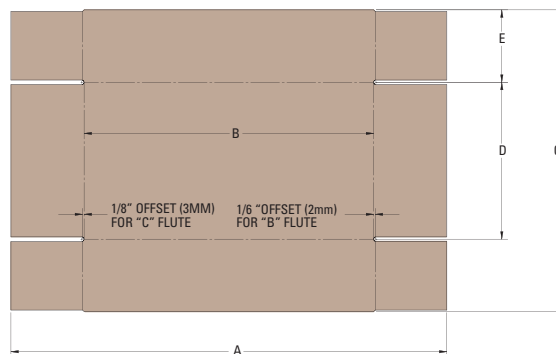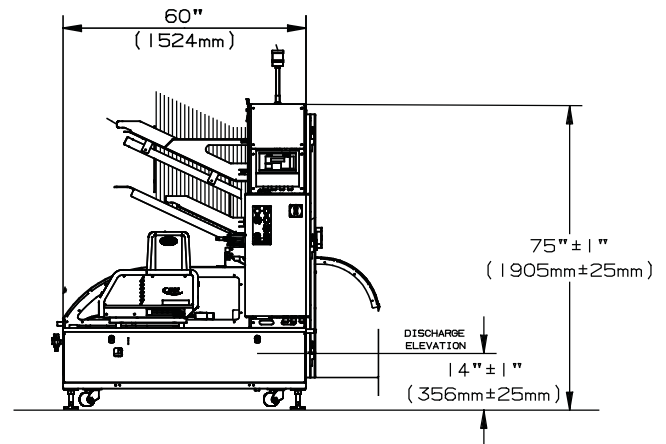

## CARTON SIZE RANGE

| Dimensions | (in.) |       | (mm) |     |
|------------|-------|-------|------|-----|
|            | Min   | Max   | Min  | Max |
| A          | 11.25 | 36    | 285  | 915 |
| B          | 8.25  | 25.75 | 210  | 655 |
| C          | 10    | 26    | 255  | 660 |
| D          | 7     | 18    | 180  | 455 |
| E          | 2     | 8     | 50   | 200 |
| F          | 8.5   | 21    | 215  | 535 |

Modifications are available to extend the size range.  
Not all minimums and maximums apply.



For more information on this product, scan the QR code with your mobile device.