





Semi-Automatic Tape Sealer  
Up to 30 cases per minute



**RSC Case**  
The BEL 130  
seals RSC  
cases.

## Quick Change Semi-Automatic Case Sealer



### Easy Case Change

Size changes on the BEL 130 are fast and effortless. A self-centering width adjustment and counter-balanced upper assembly with a single lever clamp reduces size changes to seconds.



### Superior Tape Application

The BEL 130 is equipped with state-of-the-art DEKKA High Performance plated steel tape heads that are easily loaded in or out of the machine in 30 seconds or less.



Case Sealer

BEL 130

# BEL 130 Quick Change Semi-Automatic Case Taper

## BEL 130 Features

- Slim profile, heavy gage welded structural tube frame enables easy access to bottom tape head
- Tough epoxy powder coating resists chipping and flaking
- One piece modular design drive system is easily removed from machine frame for convenient bench service
- Magnetic Motor Starter (oil and dust tight)
- DEKKA's exclusive "No Break" tape feed delivers reliable performance with all brands and grades of pressure sensitive tape. The DEKKA head is especially forgiving when applying light weight, lower cost tapes
- Standard DEKKA 02 Plated Steel 2" (51mm) tape heads and optional DEKKA 22 Stainless Steel 2" tape heads

## Complete Solution



### BEL505 Case Former

The BEL 505 improves efficiency and ergonomics. Inserting a case into the BEL 505 results in all four bottom flaps being automatically folded, leaving hands free to pack.



### A32 Accumulation Table


Rotary turntable that presents product to the operator for packing. Features an adjustable speed motor.




### KDF Box Stand

Height adjustable stand for holding case blanks and keeping them off the floor. Speeds up productivity by positioning case blanks conveniently to the operator.

## How the BEL 130 Works



**RSC Case**  
The BEL 130 seals RSC cases.

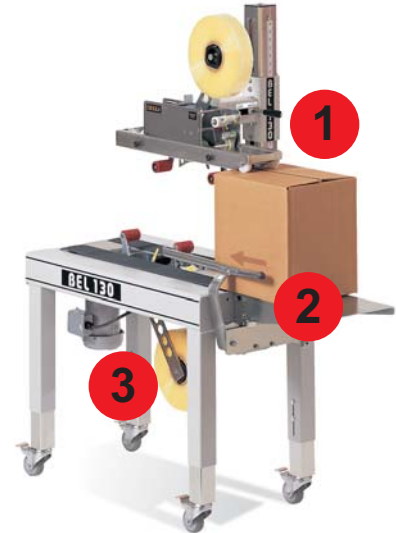


### 1 Height Adjustment

Upper assembly is adjusted with a single lever clamp which increases or reduces size in seconds.



### 2 Width Adjustment

The self centering width adjustment is effortless.



### 3 Top & Bottom Sealed

Superior case sealing performance is achieved with its quality tape application. The BEL 130 comes standard with DEKKA tape heads.

## BEL 130 Specifications

Case Size Range	Length	Width	Height
Minimum	6" 152 mm	5" 127 mm	3 1/2" 89 mm
Maximum	unlimited	20" 508 mm	20" 508 mm
Infeed/Outfeed Height			
Minimum	21 1/2" (546 mm) with pads		
Maximum	33 1/2" (851 mm) with pads		
Machine Speed: Up to 30 cases per minute depending on box size.			

\* Specifications are subject to change without notice.



Your Local Distributor:  
Marsh Micro Systems, Inc.  
1084 Duncan Ave.  
Chattanooga, TN 37404

Phone: 423-629-6245  
Fax: 423-624-7019  
Email: sales@marshmicrosystems.com  
Web: www.marshmicrosystems.com

a division of Pro Mach 

Backed by Wexxar's warranty and experienced, nationwide distributorship team.