

# FUSION • Intermittent Motion L-Bar Sealer

*Fusing Tomorrow's Shrink Packaging Requirements with Today's Budgets*

*Detail showing the L-Bar Sealer*



**MADE IN USA**



High Performance Automatic Shrink Packaging Systems

## Conflex® ... Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

### Value Priced – Versatile and Flexible

The Conflex® FUSION is setting the new industry standard as the machine of choice for entry-level wrappers. The value price and flexibility of options make it the perfect choice for automatic applications. By fusing the technology and economies of side sealing with the financial commitment of an automatic L-bar sealer, Conflex® makes the FUSION the smart choice to fill your shrink wrapping needs.

### Conflex® FUSION Features and Benefits

- **Color HMI Touch Screen** - Provides intuitive, operator-friendly product setups in three languages
- **Easy Load Film Cradle** - The fast threading process makes changeovers more efficient
- **Self-Tracking Belts** - Eliminates tracking issues and reduces maintenance
- **Open Access/Swing-Out Inverting Head** - Allows fast film threading
- **Large Film Selvage Cone** - Can hold two rolls of film scrap, reducing costly downtime
- **Mushroom Style Seal Bar** - Provides positive hot knife sealing on most films
- **UL Listed Electronics** - For dependable operation
- **Universal Side Sealer** - Runs a variety of films
- **Casters and Leg Levelers** - Standard equipment
- **Multiple Options Available** - Left-to-right product flow, stainless steel and other customizable options available


### Conflex® FUSION Specifications

Electrical Requirements	220V, 20 Amps, 1 Phase
Air Requirements	80 psi, 1 cfm
Seal Bar Width, Length & Height	24" W x 24" L, 10" high
Maximum Film Width	31"*
Maximum Roll Diameter	14"
Overall Machine Dimensions	79" L x 57.5" W x 59.5" H
Maximum Operating Speeds	100' film per minute**
Deck Height on Casters	34 3/4"
Package Dimensions	2" L to 22" 1" W to 22" W** 1/8" H to 10" H

\*May require additional components and set-up time to run the entire size range

\*\* Product dependent

### Conflex® FUSION L-Bar Plan View

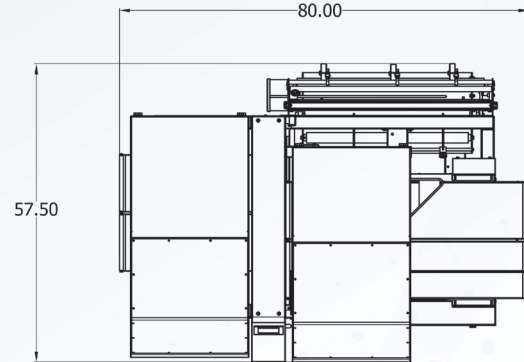

The Conflex® engineering department is available to customize machinery for special product applications.



Conflex Incorporated  
Manufacturing Facility:  
W130 N 10751 Washington Drive  
Germantown, WI 53022

Toll Free: 800-225-4296  
Fax: 262-512-1665  
Email: [info@conflex.com](mailto:info@conflex.com)  
[www.conflex.com](http://www.conflex.com)



Distributed By: