



Intermittent Pick 'n Place®

FEATURES AND BENEFITS

- Only feeder on the market with vertical or horizontal placement
- Simple design and easy installation
- Clean, logical control panel design makes the machine easy to operate
- Standard construction incorporates a sanitary design suitable for most bakery or pharmaceutical installations. Washdown construction available
- Standard air cylinder drive offers a virtually maintenance free motion control and drive system
- Smooth pivot rod motion creates a steady placement, especially at higher speeds
- Pivot rod motion control enhances machine versatility, allowing for the possibility of the unit to be utilized in future tasks
- Quick and easy product changeover means less downtime and greater machine efficiency
- Many options available, allowing the end user to customize the machine to their specific needs
- Materials typically handled include; multi-fold coupons, labels, plastic trays, corrugated, styrofoam trays, parchment paper, foil trays, glassine, paperboard trays, card stock, packets, single sheet paper stock

Intermittent Pick 'n Place

Typical Utility Requirements

- ELECTRICAL: 115 VAC 12 Amps Max (with optional low noise vacuum pump)
- AIR: 80 PSI filter and regulator provided
- VACUUM: Up to 10 SCFM At 20" HG

Maximum Speeds


- 70 cycles per minute vertical placement mode
- 60 cycles per minute horizontal placement mode

Product Size Range

- Minimum: 1" (26mm) x 1" (26mm)
- Height: 6" (152mm), 9" (229mm), 12" (305mm), and 15" (381mm) high magazines are available.
- Width: 18" (457mm) and 28" (711mm) wide magazines are available. The maximum product height is the same.

Maximum heights by model:

- IPP-170D: 9" (229mm)
- IPP-190D: 12" (305mm)
- IPP-1110D: 15" (381mm)

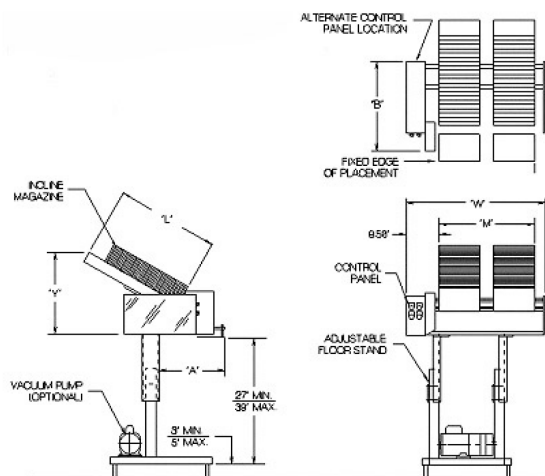

Options Available

- Machine orientation
- Vertical placement mode
- Denesting motion
- 16, 30, or 48" long magazines
- Oscillating rod magazines
- Quick change magazines
- Low noise vacuum pump
- Venturi vacuum system
- Floor Stand: CRS painted welded, stainless steel tubing or C-channel stainless steel
- Screw height adjustment
- Adhesive system
- 7" (178mm) or 12" (305mm) wide machine
- Photoelectric cycle control
- Plexiglass front guard
- Missed detection system with or without buzzer
- Kwik Klip™ assemblies
- Auto recycle if an item is missed
- Casters
- No tool magazine changeover

MODEL	A	B
270D	14.75" (375 mm)	24.50" (622 mm)
290D	18.75" (476 mm)	26.50" (673 mm)
2110D	22.75" (578 mm)	28.50" (724 mm)

WIDTH (W)		LENGTH (L)	
M	W	L	Y
18"	30.50" (775 mm)	16.25" (413 mm)	18" (457 mm)
		30" (762 mm)	25" (635 mm)
28"	40.50" (1,029 mm)	48" (1219 mm)	34" (864 mm)

MGS

9900 85th Ave North, Maple Grove, MN 55369 USA
 T (800) 790-0627
www.mgsmachine.com
info@mgsmachine.com

