

Hollymatic Hi•Yield 14 Meat Saw

SUPERMARKET EDITION

STAINLESS STEEL
WHEELS STANDARD!

EXCLUSIVE FEATURES FOR SAFETY AND EASE OF OPERATION

The Hollymatic Hi•Yield 14 has features that separate it from other conventional saws.

- ▶ Swing open construction allows for easy cleaning and blade changing.
- ▶ Safety interlocked doors.
- ▶ Easily removed upper and lower wheels speeds cleanup.
- ▶ Double flanged wheels for blade retention and tracking.
- ▶ One-piece frame design improves sanitation and provides rigidity for added strength.
- ▶ Peaked upper housing to prevent water retention.
- ▶ Space saving compact footprint.

For more information contact Hollymatic or your local authorized Hollymatic Dealer today!




Hollymatic®

FOOD PROCESSING EQUIPMENT SINCE 1937

STANDARD FEATURES FOR SAFETY AND EASE OF OPERATION

- **Stainless Steel removable upper and lower wheels** are designed with blade retaining double flanges for safety.
- Fully adjustable blade guard allows visibility while cutting.
- Exclusive, two-piece swing open stationary table for easy blade change and clean-up.
- Exclusive slide bar movable table swings open for easy cleaning.
- Powerful 3 HP motor coupled with double V-belt drive.
- Grease zerk to lubricate lower and upper wheel.
- All legs are adjustable to conform to floor irregularity.

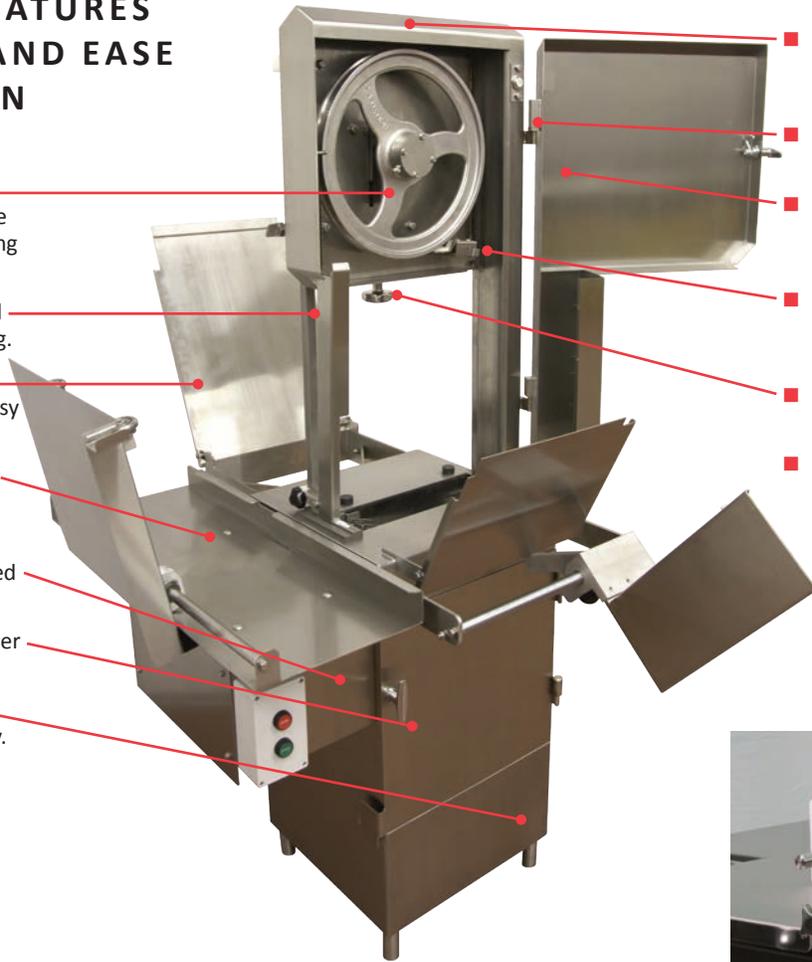

- Peaked upper enclosure doesn't retain water and cannot be used as a shelf.
- Safety interlocked upper and lower doors.
- Hinged and removable door for changing blades, easy clean-up and maintenance.
- Exclusive heavy-duty channel column provides one-piece rigid support.
- Convenient to use handle for blade tension adjustment.
- **Easiest saw on the market to clean up without complete disassembly.**



Optional Custom Product Pusher

SPECIFICATIONS

- MOTOR:** 3 HP 200-240 Volt, 50/60 Hz., 3-Phase Drip Proof (Soft Start).
- SPEED:** 4200 Blade ft./min. (BFM)
- BLADE:** High Quality Hardened Steel Blade. 5/8" x 114" (Included).
- BLADE SCRAPER/WHEEL CLEANER:** Complete Assemblies, Are Removable Without the Use of Tools.
- WHEELS:** Stainless Steel / Double flange.
- BLADE GUIDES:** Carbide Steel.
- DRIVE:** Double V-belt pulley, grease packed tapered roller bearings, waterproof housing.
- SWITCH:** Waterproof Enclosure.
- SAFETY INTERLOCK:** Power Automatically Shuts Off When Upper or Lower Doors Are Opened.
- CUTTING CLEARANCE:** 14.5" High x 13.25" Wide.
- CUTTING TABLE:** Two Piece Swing Open Back Table 32" Wide x 15.75" Deep
- MOVABLE TABLE:** 19" Wide x 15.75" Deep
- MOTOR OPTIONS:**
 - 3 HP 460 Volt, 60 Hz., 3-Phase
 - 3 HP 575 Volt, 60 Hz., 3-Phase
 - 3 HP 380 Volt, 50 Hz., 3-Phase
 - 3 HP 200-240 Volt, 50/60 Hz., 1-Phase
- OPTIONS:**
 - Portion Control Meat Gauge
 - Custom Product Pusher

