


STABILITY AND RELIABILITY

Genie® IWP™ Super Series lifts can be easily moved around your worksite and set up in seconds. In addition, all AC and DC models are equipped with an auxiliary platform-lowering feature on both platform and ground controls, enabling descent in the event of a power failure. Reaching heights of 35 ft 6 in (11 m), the easy-to-use IWP™ comes in two base models (standard and wide) with six different platform options to meet your specific application requirements.

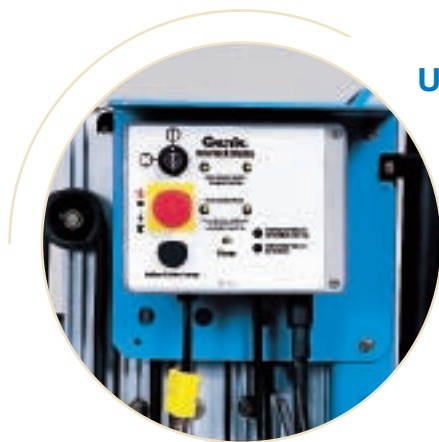

USER-FRIENDLY PLATFORM AND CONTROLS

Control features include a low battery indicator, locking key switch, a dual-activated up/down switch and proper setup confirmation. Select units have a ground fault interrupt receptacle on the platform for convenient use of power tools.



**Effortless setup in seconds
quickly gets you working at
heights of up to 35 ft 6 in (11 m).**



OUTREACH OPTION

Provides over 18 inches (46 cm) of additional horizontal reach (IWP™-20S only).
Ideal for maneuvering up and over shelves, machinery and equipment.


EXCEPTIONAL STABILITY

Rigid aluminum mast provides user comfort and security, and features heavy-duty lifting chains for strength and reliability. Units also feature built-in automatic level sensing.
Two front integral leveling jacks provide an additional 2 in (5 cm) of adjustability.



DOORWAY ACCESS

The standard base model easily rolls through standard doorways. Wide base models roll through typical industrial double doorways.

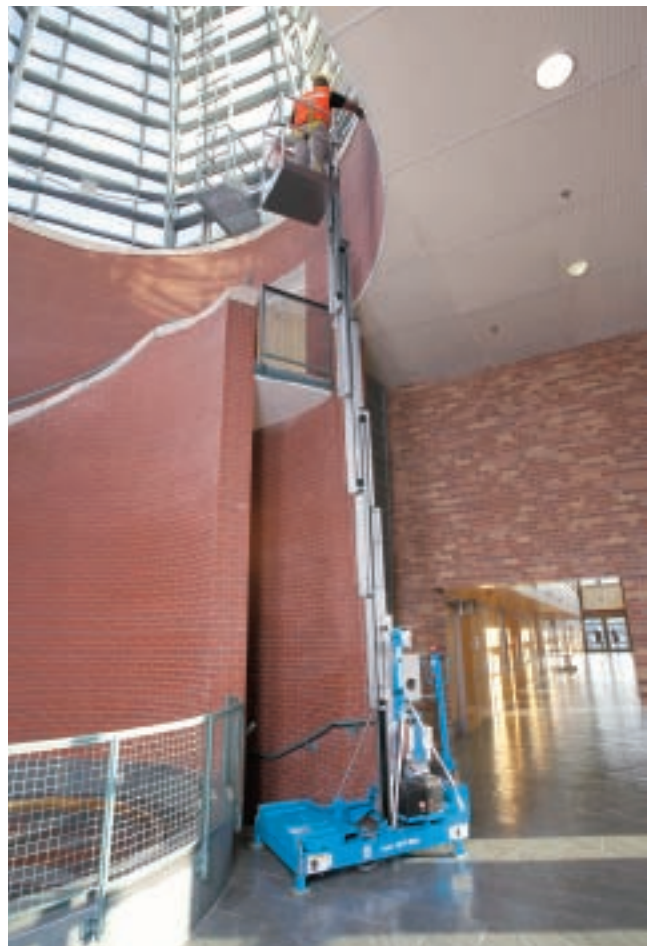

INDUSTRIAL WORK PLATFORM MODELS AVAILABLE


IWP™-20S

IWP™-25S

IWP™-30S

Specifications

MODELS	IWP™-20S		IWP™-25S		IWP™-30S	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	26 ft 6 in	8.24 m	30 ft 5 in	9.44 m	35 ft 6 in	11 m
Platform height	20 ft 6 in	6.24 m	24 ft 5 in	7.44 m	29 ft 6 in	9 m
A Horizontal outreach**	2 ft 2 in	.66 m	—	—	—	—
B Height - stowed:						
fully lowered	6 ft 4 in	1.93 m	6 ft 4 in	1.93 m	6 ft 4 in	1.93 m
base raised	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m
C Length	5 ft	1.52 m	5 ft	1.52 m	5 ft	1.52 m
D Width - standard base	2 ft 8 in	.81 m	2 ft 8 in	.81 m	—	—
wide base	3 ft 4 in	1.02 m	3 ft 4 in	1.02 m	3 ft 4 in	1.02 m
Corner access***	6 in	.15 m	6 in	.15 m	7 in	.18 m



PRODUCTIVITY						
Lift capacity: ANSI/CE	350 lbs	159 kg	350 lbs	159 kg	350 lbs	159 kg
CSA	300 lbs	136 kg	300 lbs	136 kg	—	—
With outreach option	300 lbs	136 kg	—	—	—	—
Platform Dimensions (l/w/h)						
Standard	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm
Gated standard	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm
Gated ultra narrow**	22/18/44.75 in	56/46/114 cm	22/18/44.75 in	56/46/114 cm	22/18/44.75 in	56/46/114 cm
Gated narrow	26/20/44.75 in	66/51/114 cm	26/20/44.75 in	66/51/114 cm	26/20/44.75 in	66/51/114 cm
Front entry gated narrow	20/26/44.75 in	51/66/114 cm	20/26/44.75 in	51/66/114 cm	20/26/44.75 in	51/66/114 cm
Front/side entry extra-large**	30/28/44.75 in	76/71/114 cm	30/28/44.75 in	76/71/114 cm	30/28/44.75 in	76/71/114 cm
Standard fiberglass**	29/26.5/43.5 in	74/67/110 cm	29/26.5/43.5 in	74/67/110 cm	29/26.5/43.5 in	74/67/110 cm
Narrow fiberglass**	26/22/43.5 in	66/56/110 cm	26/22/43.5 in	66/56/110 cm	26/22/43.5 in	66/56/110 cm

POWER	
AC models	110 V / 50-60 Hz or 220 V / 50-60 Hz
DC models	12V / 110 V / 60 Hz or 110/230 Hz worldwide model

WEIGHT****

Standard base						
ANSI (AC)	1,245 lbs	565 kg	1,290 lbs	585 kg	—	—
ANSI (DC)	1,345 lbs	610 kg	1,390 lbs	630 kg	—	—
CE (AC)	1,245 lbs	565 kg	1,290 lbs	585 kg	—	—
CE (DC)	1,345 lbs	610 kg	1,390 lbs	630 kg	—	—
CSA (AC)	1,633 lbs	741 kg	—	—	—	—
CSA (DC)	1,733 lbs	786 kg	—	—	—	—

Standard base with outreach option						
ANSI (AC)	1,350 lbs	612 kg	—	—	—	—
ANSI (DC)	1,450 lbs	658 kg	—	—	—	—
CE (AC)	1,350 lbs	612 kg	—	—	—	—
CE (DC)	1,450 lbs	658 kg	—	—	—	—

Wide base						
ANSI (AC)	1,345 lbs	610 kg	1,390 lbs	630 kg	1,430 lbs	649 kg
ANSI (DC)	1,445 lbs	655 kg	1,490 lbs	676 kg	1,530 lbs	694 kg
CE (AC)	1,345 lbs	610 kg	1,390 lbs	630 kg	1,430 lbs	649 kg
CE (DC)	1,445 lbs	655 kg	1,490 lbs	676 kg	1,530 lbs	694 kg
CSA (AC)	1,525 lbs	692 kg	1,880 lbs	853 kg	—	—
CSA (DC)	1,625 lbs	737 kg	1,980 lbs	898 kg	—	—

Wide base with outreach option						
ANSI (AC)	1,450 lbs	658 kg	—	—	—	—
ANSI (DC)	1,550 lbs	703 kg	—	—	—	—
CE (AC)	1,450 lbs	658 kg	—	—	—	—
CE (DC)	1,550 lbs	703 kg	—	—	—	—
CSA (AC)	1,633 lbs	741 kg	—	—	—	—
CSA (DC)	1,733 lbs	786 kg	—	—	—	—

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gated ultra narrow and fiberglass platforms are not available with the outreach option.

*** Corner of platform top rail to corner of wall with ability to rotate leveling jack handle.

**** Weight will vary depending on options and/or country standards.

STANDARDS COMPLIANCE ANSI A92.3, CSA B354.1, CE Compliance, AS 1418.10

www.genieindustries.com

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Sliding mid-rail standard platform
- Gated standard platform
- Gated ultra narrow platform
- Gated narrow platform
- Standard fiberglass platform
- Narrow fiberglass platform

POWER OPTIONS

- AC power 110V / 50-60 Hz
- AC power 220V / 50-60 Hz
- DC power 110V / 50-60 Hz
- DC power 110V / 230V / 50-60 Hz worldwide model
- Power assist option

BASE OPTIONS

- Standard base (IWP-20S and 25S only)
- Wide base

STANDARD FEATURES

MEASUREMENTS

IWP™-20S

- 26 ft 5 in (8.22 m) working height
- 20 ft 5 in (6.22 m) platform height
- 2 ft 8 in (.81 m) standard base width
- 3 ft 4 in (1.02 m) wide base width
- Outreach option adds 2 ft 2 in (.66 m) of horizontal reach
- Up to 350 lb (159 kg) lift capacity

IWP™-25S

- 30 ft 5 in (9.44 m) working height
- 24 ft 5 in (7.44 m) platform height
- 2 ft 8 in (.81 m) standard base width
- 3 ft 4 in (1.02 m) wide base width
- Up to 350 lb (159 kg) lift capacity

IWP™-30S

- 35 ft 6 in (11 m) working height
- 29 ft 6 in (9 m) platform height
- 3 ft 4 in (1.02 m) wide base width
- Up to 350 lb (159 kg) lift capacity

PRODUCTIVITY

- Sliding mid-rail standard platform
- Auxiliary platform lowering
- Most rigid mast in the industry
- Choose from standard or wide base
- Standard base rolls through standard doorways
- Wide base rolls through double doorways
- AC power to platform
- Dual activated up/down switch
- Ground fault interrupt lower receptacle
- Tie down attachment points
- Overhead crane attachment points
- Wide forklift pockets
- Built-in level sensing with interlocks

POWER

- AC power 110V / 50-60 Hz
- AC power 220V / 50-60 Hz
- DC power 110V / 230V / 50-60 Hz with worldwide automatic "smart" charging system



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Gated standard platform
- Gated ultra narrow platform
- Gated narrow platform
- Standard fiberglass platform (not available with outreach)
- Narrow fiberglass platform (not available with outreach)
- Outreach option (IWP-20S only)
- Operational working light and descent alarm package
- Tool tray
- Fluorescent tube caddy
- Platform locating laser light

POWER

- Power wheel assist with dual battery package*
- Dual battery package

* Adds 12.5 in (.32 m) to unit length and 285 lbs (129 kg) to unit weight

Working At Height Limited

(Southern Office)
Amberley Court
Old Elstead Road
Milford
Surrey
GU8 5EB

Tel: 01483 415 410
Fax: 01483 417 719

Working At Height Limited

(Northern Office)
The Portergate
Ecclesall Road
Sheffield
South Yorkshire
S11 8NX

Tel: 0114 209 6206
Fax: 0114 209 6001

Suppliers of:

Powered Access Platforms
Aerial Work Platforms
Runabout Access Platforms
Scissor Lifts
Articulating Boom Access Platforms
Telescopic Boom Access Platforms
Material Lifts
Telehandlers
MEWPS Training