


BAG DECUFFER FOLDER DF-11

The DF-11 automatically decuffs, regussets and closes the bag by folding.

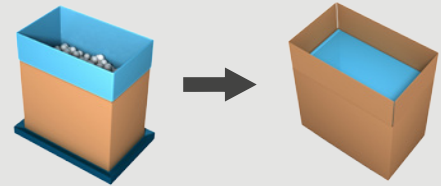

COMBINE WITH
**THE CASE
CLOSER**

Protect your product

- The DF-11 guarantees a **perfect bag overlap folding** to avoid contact between the product and the carton.
- **Reclosable.**

Maximize your productivity

- Up to **15** cases / minute.
- Quick format change.



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS DF-11

Perfectly controlled bag overlap folding

- Decuffing before folding.
- Regussetting and bi-directional folding ensures perfect bag closing and avoids contact between product and carton.

High speed

- Heavy duty roller conveyor and stopper system for high speed case transfer of filled boxes.

Equipped with colour touch panel for easy operation

Hygienic design, easy to clean



Decuffing hooks




The gusset plates regusset the film




Front film folder

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)

Type	Cases, trays, boxes, crates
Range (L x W // D) inches	Min. 12" (L) x 8" (W) x 5" (H) * Max. 25 1/2" (L) x 16" (W) // 25 1/2" (D)
	Outside dimensions
* 5" < H < 8"	Small adaptations required
* H < 5"	Box lift is necessary, reduce of output
* W > 13" and 6" < H < 8"	Small adaptations required
* W > 13" and H < 6"	Box lift is necessary, reduce of output

FILM SPECIFICATIONS


Type	PE (LDPE, HDPE)
Thickness	As from 0.4 mil
	$X = L + 5/8"$ $Y = (W + 13/4") / 2$ $5 1/2" \leq Q \leq 7"$

OUTPUT AND CONSUMPTION

Output	Standard 12 c/min, up to 15 c/min Standard 10 c/min, up to 13 c/min for SL
Installed power	2 kW
Voltage	3 x 480V + E / 60 Hz
Air supply	90 PSI, [1/2" min]
Air consumption	0.7 ft³ / cycle
Weight	1100 lbs

OPTIONS (More options are available, please contact Pattyn)

DF-11 Max for larger cases	Min. 16" (L) x 10" (W) x 8" (H) Max. 32" (L) x 19 1/2" (W) // 26" (D)
Output DF-11 Max	Up to 8 cases/minute
DF-11 with second integrated folding station	Up to 20 cases/minute
Fast machine	Speed above 12 to 15 cases/minute
Decuffer control on regussetting bars for film detection	
Access point for remote support	

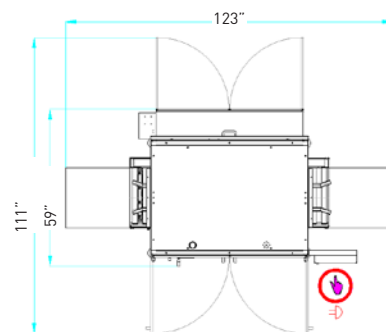

Machine height 81 inches

Pattyn North America Inc.
N76 W30500 County Road Vv
Hartland, WI. 53029 - U.S.A

Ph +1 262-966-0300
Fax +1 262-966-0312
SalesUsa@pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customized executions please contact Pattyn. DF-11 2019 - V01

PATTYN®

Turnkey solutions for industrial packaging.