






SEMI-AUTOMATIC MINI PISTON FILLER MODEL – MP-1SH

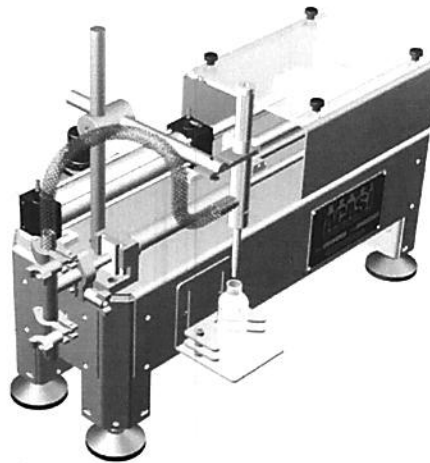

DRAWING

650-1SH-000

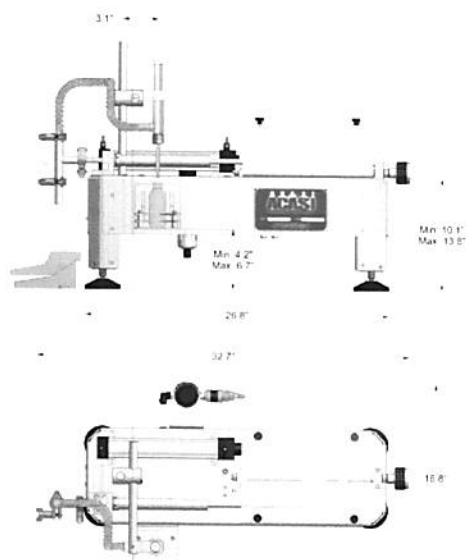

First price quoted
whenever you need

MACHINE REVER: Inexpensive for
volume
CAPACITY: 100
PRODUCTION SPEED
OPTION: 100

ACASI
MACHINERY INC.



Construction features:

- Heavy duty 1.50in bore air cylinder with mechanical stroke adjustment.
- Piston stroke pneumatic driven and easy to adjust.
- Capable of handling breakable particles up to ¾ in diameter.
- Anodized aluminum thickness 1 in bottom plate.
- Heavy duty 304 stainless steel screwed frame construction.
- 3 way rotary or check valves.
- All contact parts are stainless steel, sanitary, teflon, Buna, Viton.

Standard features:

- Nozzle fully adjustable in any direction.
- Height nozzle can be fully adjustable.
- Works with plastic or glass containers.

Pneumatic requirements:

- 10 CFM @ 80 psi.

Pistons – Check Valve:

- Filling piston manufactured in 316L stainless steel.
- Each set includes one piston, core and required seals.

3/8" diameter (1.5 to 7.5 ml):

1/2" diameter (3 to 15 ml):

3/4" diameter (6 to 30 ml):

1" diameter (12 to 60 ml):

1.5" diameter (30 to 150 ml):

2.5" diameter (80 to 400 ml):

Open nozzles (standard length):

- Sizes available: 0.125, 0.1875, 0.25, 0.375 and 0.5

Drip free nozzles (standard length):

- Contact parts manufactured in 316L stainless steel.
- 3 inch stroke air cylinder.



- Teflon spring loaded seal
- Threaded Teflon tip.
- Sizes available: 1.25, 1, 3/4, 5/8, 9/16, 1/2, 3/8 and 1/4 inch.

Price each (1/4 inch to 3/4 inch):

Drip free nozzles (bottom-up):

- Contact parts manufactured in 316L stainless steel.
- 3 inch stroke air cylinder.
- Teflon spring loaded seal
- Threaded Teflon tip.
- Sizes available: 1.25, 1, 3/4, 5/8, 9/16, 1/2, 3/8 and 1/4 inch.
- Outer tube length: 10 inches

Price each (1/4 inch to 3/4 inch):